


New Wall Mounted Model

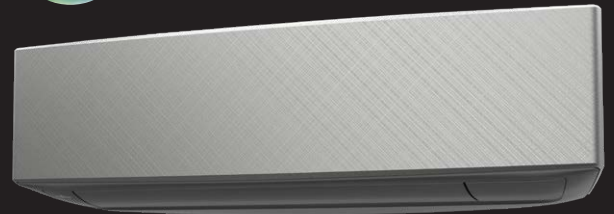

ASYG07KETA / AOYG07KETA
 ASYG09KETA / AOYG09KETA
 ASYG12KETA / AOYG12KETA
 ASYG14KETA / AOYG14KETA

Point Cool Viewty Design

What we aim is a well-designed air conditioner especially for Europe. It is different from Japanese one harmonized with its surroundings and it appeals comfortable elegant feeling in the room. Light-elegant and three-dimensional expression composed of curved surface is beautiful from anywhere.




CMF : COLOR MATERIAL FINISH

The texture of the front panel expresses craftsmanship existing in Europe. The texture changes the expression by the changing light of the day.

Point High energy saving

Top class high efficiency is achieved by high efficient lamda heat exchanger, large cross flow fan and new refrigerant.

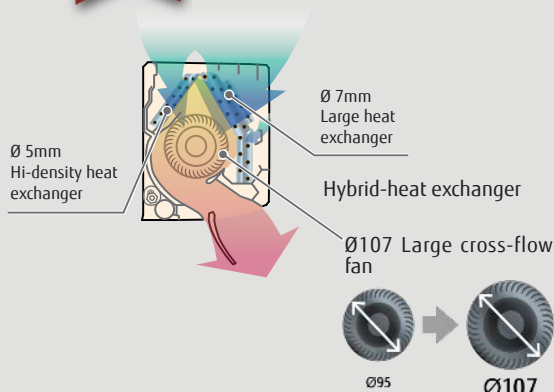


Point Comfortable airflow & Silent operation

The big louver and the new air blowing structure have attained a comfortable air flow that spreads wider to user's feet and silent operation.

Point Smart Device control (Option)

This model can be controlled from anywhere using smart device by installing optional wireless LAN interface. Wireless LAN interface can be installed easily without specialized installation work.

When you add our Wireless Interface and FGLair app, you can control your home's cooling and heating anytime and anywhere.

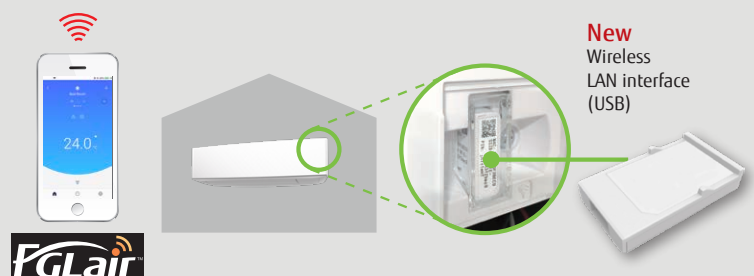

Model : ASYG07KETA / ASYG09KETA / ASYG12KETA / ASYG14KETA



Wireless RC



ASYG07 / 09 / 12 / 14KETA



AOYG07 / 09KETA



AOYG12 / 14KETA

Optional parts


Wired Remote Controller (Touch Panel)	: UTY-RNRYZ3
Wired Remote Controller	: UTY-RLRY
Simple Remote Controller	: UTY-RSRY,UTY-RHRY
Communication Kit	: UTY-TWRXZ2
External Input and Output PCB	: UTY-XWZXZ5
Wireless LAN Interface	: UTY-TFSXF2
External Connect Kit	: UTY-XCSXZ2

Feature explanation


Auto-Changeover	Up / down swing flaps	Program timer	Sleep timer	Weekly timer
10 HEAT operation	Economy mode	Powerful mode	Low noise mode	Auto restart
Filter sign				

Dimensions


Indoor unit : ASYG07KETA / ASYG09KETA
ASYG12KETA / ASYG14KETA

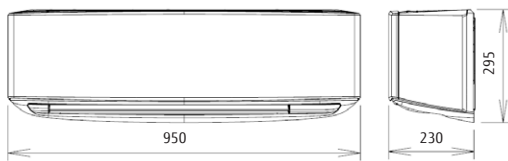

Outdoor unit : AOYG07 / 09KETA

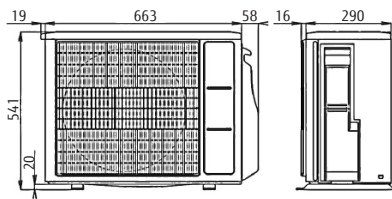

AOYG12 / 14KETA

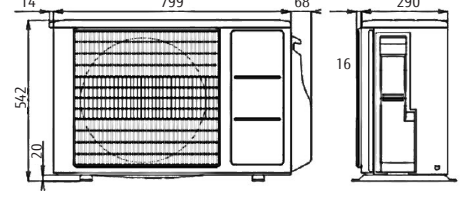

(Unit : mm)

Specifications

Model name	Indoor unit		TENTATIVE	TENTATIVE	TENTATIVE	TENTATIVE
	Outdoor unit		ASYG07KETA	ASYG09KETA	ASYG12KETA	ASYG14KETA
Power Source			Single - phase, ~ 230V, 50Hz			
Capacity	Cooling	kW	2.0 (0.9 - 3.0)	2.5 (0.9 - 3.2)	3.4 (0.9 - 3.9)	4.2 (0.9 - 4.4)
	Heating		2.5 (0.9 - 3.4)	2.8 (0.9 - 4.0)	4.0 (0.9 - 5.3)	5.4 (0.9 - 6.0)
Input Power	Cooling / Heating	kW	0.450 / 0.555	0.630 / 0.620	0.935 / 0.960	1.220 / 1.410
EER	Cooling	W/W	4.43	3.97	3.65	3.44
	Heating		4.52	4.52	4.17	3.83
Pdesign	Cooling / Heating (-10°C)	kW	2.0 / 2.3	2.5 / 2.4	3.4 / 2.5	4.2 / 4.0
SEER	Cooling	W/W	7.40	7.40	7.30	6.9
SCOP	Heating (Average)		4.10	4.10	4.40	4.1
Energy Efficiency Class	Cooling		A++	A++	A++	A++
	Heating (Average)		A+	A+	A+	A+
Max. Operating Current	Cooling / Heating	A	6.5 / 9.0	6.5 / 9.0	6.5 / 9.0	6.5 / 9.0
Annual Energy Consumption	Cooling	kWh/a	95	118	163	213
	Heating		785	819	795	1,367
Moisture Removal		l/h	1.0	1.3	1.8	2.1
Sound Pressure Level	Indoor (Cooling)	H / M / L / Q	38 / 33 / 29 / 20	40 / 34 / 29 / 20	40 / 35 / 30 / 20	43 / 36 / 30 / 20
	Indoor (Cooling)	H / M / L / Q	41 / 35 / 31 / 22	42 / 36 / 31 / 22	42 / 38 / 33 / 22	44 / 39 / 33 / 24
	Outdoor (Cooling / Heating)	High	46 / 46	46 / 46	50 / 50	50 / 50
Sound Power Level	Indoor (Cooling / Heating)	High	54 / 56	55 / 57	55 / 58	57 / 59
	Outdoor (Cooling / Heating)	High	61 / 61	61 / 62	65 / 65	65 / 66
Airflow Rate	Indoor / Outdoor (Cooling)	High	650 / 1,650	700 / 1,650	700 / 1,700	770 / 1,680
	Indoor / Outdoor (Heating)	High	720 / 1,450	750 / 1,450	770 / 1,470	800 / 1,580
Net Dimensions	Indoor	mm	295×950 (wall side : 840)×230	295×950 (wall side : 840)×230	295×950 (wall side : 840)×230	295×950(wall side:840)×230
H × W × D	Outdoor	mm	541×663×290	541×663×290	541×663×290	542×799×290
Weight	Indoor	kg(lbs)	11.0	11.0	11.0	11.5
	Outdoor	kg(lbs)	23	23	25	31
Connection Pipe Diameter (Liquid / Gas)		mm	6.35 / 9.52	6.35 / 9.52	6.35 / 9.52	6.35 / 9.52
Drain hose Diameter (I.D. / O.D.)		mm	13.8 / 15.8 to 16.7	13.8 / 15.8 to 16.7	13.8 / 15.8 to 16.7	13.8 / 15.8 to 16.7
Max Pipe Length (Pre - Charge)		m	20 (15)	20 (15)	20 (15)	20 (15)
Max Height Difference		m	15	15	15	15
Operation Range	Cooling	°CDB	-10 to 46	-10 to 46	-10 to 46	-10 to 46
	Heating		-15 to 24	-15 to 24	-15 to 24	-15 to 24
Refrigerant	Type (Global Warming Potential)		R32 (675)	R32 (675)	R32 (675)	R32 (675)
	Charge	kg(CO2eq-T)	0.6 (0.405)	0.6 (0.405)	0.7 (0.473)	0.8 (0.574)

Note : Specifications are based on the following conditions.
Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.
Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.



ISO 9001
Certified number: 01 100 075229
Fujitsu General (Thailand) Co., Ltd.

ISO 14001
Certified number: 01 104 9245
Fujitsu General (Thailand) Co., Ltd.

- Specifications and design are subject to change without notice for further improvement.
- Actual products' colors may be different from the colors shown in this printed material.

Distributed by :

FUJITSU GENERAL LIMITED

3-3-17, Suenaga, Takatsu-ku, Kawasaki 213-8502, Japan
<https://www.fujitsu-general.com/>