

New Wall Mounted Model

New design for home and commercial use released !



ASYG18/24KLCA
AOYG18/24KLTA



Point Narrow width & Compact Design

Powerful airflow is realized despite 790mm width compact design.

790mm




H 293mm
W 790mm
D 249mm



Point ON-OFF Programmable timer


You can set an integrated ON-OFF or OFF-ON timer suitable for your life style. (Setting time: 0.5, 1, 1.5, 2, 2.5, ----9.5, 10, 11, 12 hours)

From wake up to go to work



ON-OFF timer


From sleep to wake up



OFF-ON timer

Point Powerful operation


20 minutes continuous operation by maximum airflow and maximum compressor speed is possible. Rapid cooling and heating makes the room comfortable quickly.

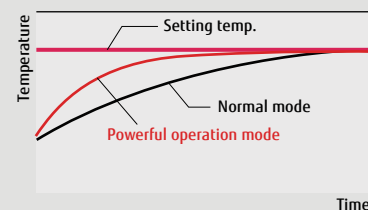

Time

Point Economy operation

Setting temp. is shifted by 1°C automatically.

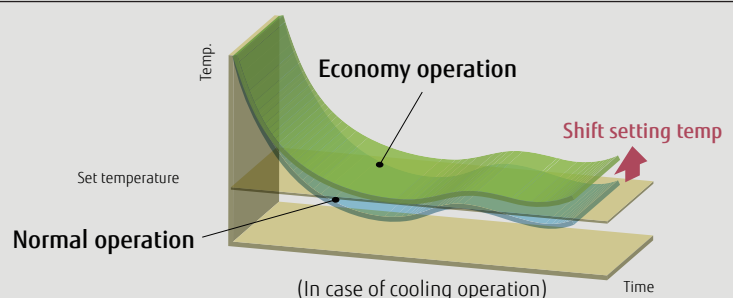

(In case of cooling operation)

**Model: ASYG18KLCA / ASYG24KLCA
AOYG18KLTA / AOYG24KLTA**



Wireless RC



ASYG18/24KLCA



AOYG18KLTA




AOYG24KLTA

Optional parts


Remote Controller Holder : UTZ-RXLA

Dimensions


Indoor unit : ASYG18KLCA / ASYG24KLCA

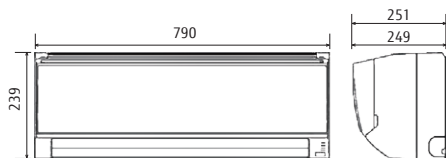

Outdoor unit : AOYG18KLTA

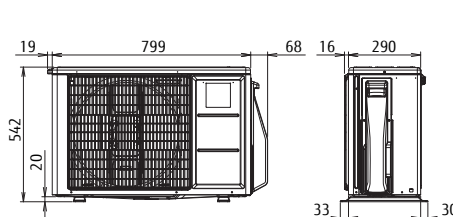

AOYG24KLTA

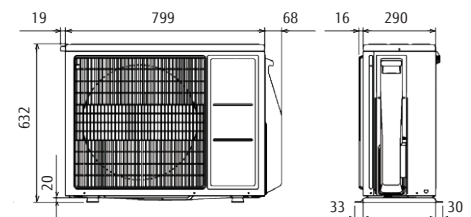

Specifications

TENTATIVE

Model name	Indoor			Outdoor		ASYG18KLCA	ASYG24KLCA
	Outdoor			AOYG18KLTA	AOYG24KLTA		
Power supply	Phase / Hz / Voltage			Ø/Hz/V		1 / 50 / 230	
Cooling	Capacity	Rated (P designc)		kW	5.20	7.10	
		Min ~ Max		kW	-	-	
	Input Power			kW	2.08	2.70	
	EER			W/W	2.65	2.65	
	Pdesignc			kW	-	-	
	SEER				5.10	5.10	
	Energy rank				A	A	
	Max Operating Current			A	9.0	11.4	
	Airflow rate (indoor / outdoor)			m³/h	- / -	- / -	
	Noise	Indoor	Sound pressure	Hi / Mi / Lo / Qu	dB(A)	48 / - / - / -	52 / - / - / -
Power level			Hi	-		-	
Outdoor		Sound pressure	Hi	50		53	
		Power level	Hi	-		-	
Heating	Capacity	Rated		kW	6.30	8.00	
		Min ~ Max		kW	-	-	
	Input Power			kW	-	-	
	COP			W/W	3.38	2.97	
	Pdesign h			kW	5.00	6.40	
	SCOP				3.80	3.80	
	Energy rank				A	A	
	Max Operating Current			A	13	13	
	Airflow rate (indoor / outdoor)			m³/h	- / -	- / -	
	Noise	Indoor	Sound pressure	Hi / Mi / Lo / Qu	dB(A)	50 / - / - / -	51 / - / - / -
Power level			Hi	-		-	
Outdoor		Sound pressure	Hi	49		56	
		Power level	Hi	-		-	
Dimension	Indoor	H×W×D		mm	293×790×249	293×790×249	
		Weight		kg	9.5	9.5	
	Outdoor	H×W×D		mm	542×799×290	632×799×290	
		Weight		kg	32.0	35.0	
Piping	Connection Pipe Diameter (Liquid / Gas)			mm	φ 6.35 / φ 9.52	φ 6.35 / φ 12.70	
	Drain hose Diameter (L.D. / O.D.)			mm	- / -	- / -	
	Max pipe length			m	25	30	
	Pre charge pipe length			m	15	15	
	Max height difference			m	20	25	
Operation range	Cooling			°C	-10 to 46	-10 to 46	
	Heating			°C	-15 to 24	-15 to 24	
Refrigerant	Amount of Refrigerant (type)			g	850 (R32)	1,100 (R32)	

Note : Specifications are based on the following conditions.

Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.

Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.



ISO 9001 Certified number: 01 100 075229
ISO 14001 Certified number: 01 104 9245
Fujitsu General (Thailand) Co., Ltd.

- Specifications and design are subject to change without notice for further improvement.
- Actual products' colors may be different from the colors shown in this printed material.

Distributed by :

FUJITSU GENERAL LIMITED

3-3-17, Suenaga, Takatsu-ku, Kawasaki 213-8502, Japan

<http://www.fujitsu-general.com/>